


23.8 inch Touchscreen All In One Product Specification

Model: YS-TC24G

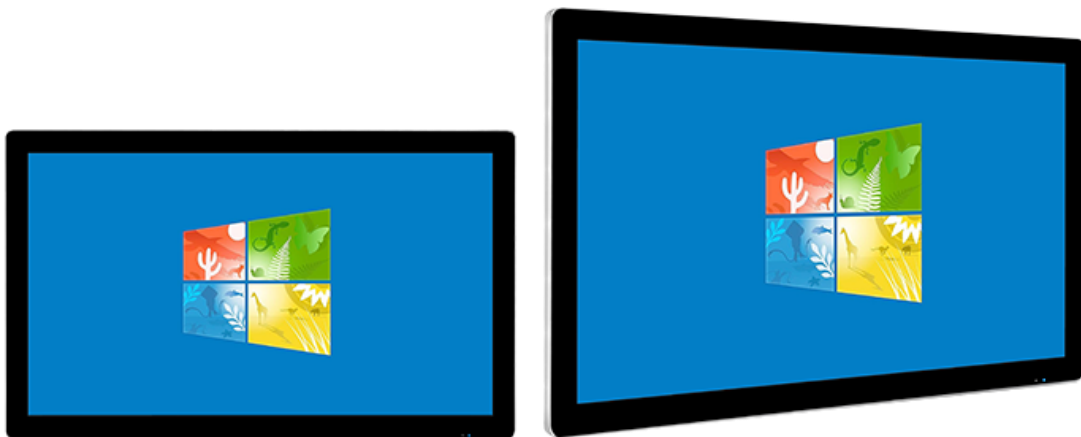

Part 1 Specification Abstract

| | Model | Parameter |
|----------------------------------|----------------------------|--|
| Display | LCD Size | 23.8" |
| | Resolution | 1920×1080 (pixels) |
| | Display area | 527.04mm×296.46mm |
| | Brightness (typ) | 250cd/m ² |
| | Contrast Ratio (typ) | 1000:1 |
| | Response Time (typ) | 14ms |
| | Viewing angle | 178° (H)/178° (V) |
| | Life Time (min) | 30,000 hrs |
| | Display Colors | 16.7M(8bit) |
| Android Configuration (standard) | CPU | Rockchip RK3568 Cotex-A55×4, clocked 2.0GHz |
| | RAM | 2GB (4G/8G optional) |
| | ROM | 16GB (32G/64G optional) |
| | OS | Android 11 system |
| | Interface | MIC-IN×1, RJ45×1, HDMI×1, SD×1, SIM×1, USB×2 |
| PC Configuration (Optional) | processor | Intel J1900 Quad Core/I3/I5/I7 |
| | hard disk | 64G SSD/128G SSD/256G SSD |
| | Memory | 4GB/8GB |
| | WIFI | 802.11 b/g/n |
| | System | Windows 10 inactive version |
| | Interface | HDMI*1, VGA*1, RJ45*1, USB*4, LINE-OUT*1, MIC-IN*1 |
| Power | Voltage | 100V~240V, 50-60Hz |
| | Maximum power | 60W |
| | Standby power | ≤1W |
| Environment | Operating Temperature | 0℃~50℃ |
| | Storage Temperature | -20℃~60℃ |
| | Working Humidity | 10%~90RH |
| | Storage Humidity | 5%~90RH |
| Function | Speaker | 5W×2 |
| Structure | Shell Material | Alloy aluminum frame ,Metal sheet |
| | Shell color | Black (White optional) |
| | Product Size (mm) (L×W×D) | 557.4×333.4×56.2mm |
| | Package Size (mm) (L×H× D) | 635×415×110mm |
| Language | OSD | English/Chinese Etc. |

| | | |
|-------------|--------------------|----|
| Accessories | Power cable | ×1 |
| | Adapter | ×1 |
| | Wall mount bracket | ×1 |
| | WIFI antenna | ×1 |
| | Product manual | ×1 |

Part 2 Touch Panel Specifications

| | | |
|-------------|----------------------------------|--------------------------------------|
| Touch Panel | Touch technology | PCAP |
| | Size | 23.8 inch |
| | Interface | USB |
| | Input voltage | DC+5V±5% |
| | Input | Hand writing or capacitive pen |
| | Touch points | 10 Points |
| | Surface Protection | 3mm Toughened Glass |
| | Surface Hardness | ≥6H |
| | Response time | 10ms |
| | OS | Win 10/Android/Linux |
| | Working Temperature and humidity | -10°C~+60°C at Min 20% to Max 85% RH |
| | Storage Temperature and humidity | -20°C~+70°C at Min 20% to Max 85% RH |

Part 3 Drawings

