


# ROHS

Front View


Side View

Back View

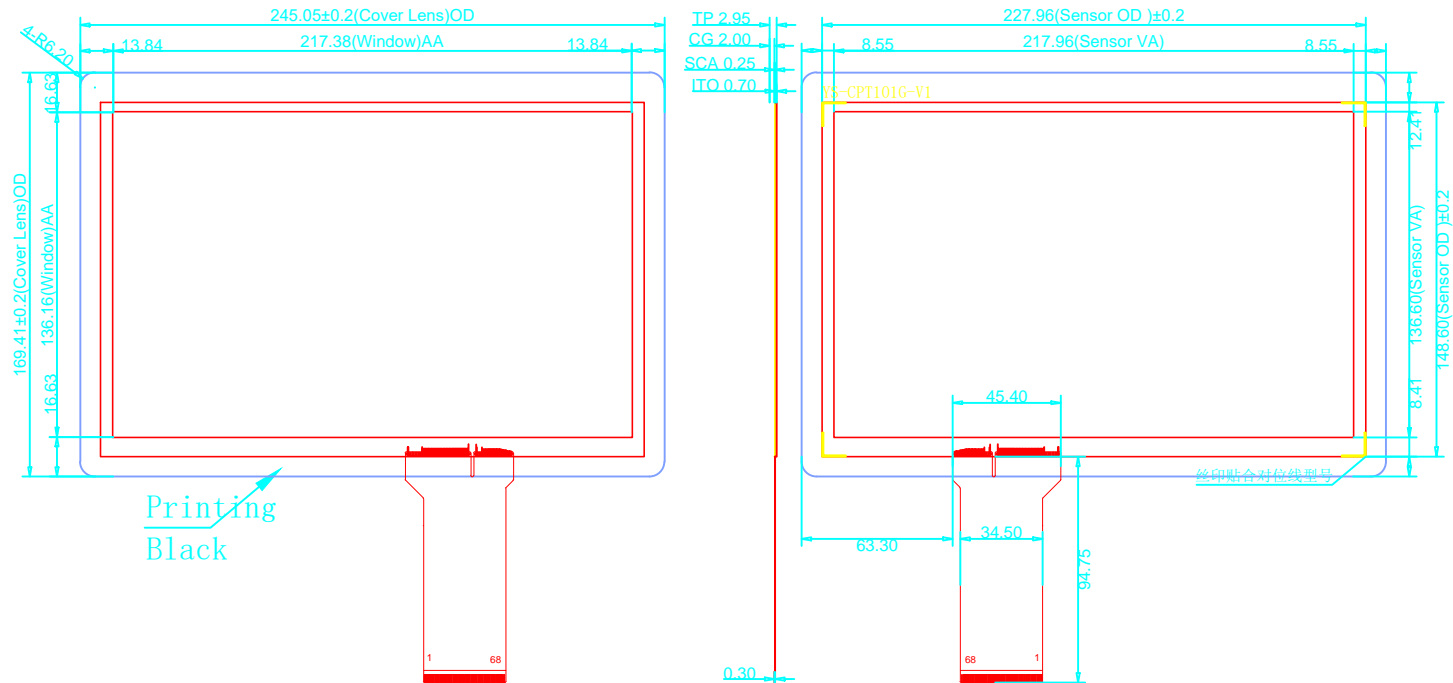

Technical parameters:

1. Product structure: G+G
2. IC: SIS9509/ILITEK2511
3. Operating Humidity: 45~85 %RH
4. Light transmission: 85%
5. Surface Hardness: 6H
6. Operating temperature:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
7. Storage temperature:  $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
8. General tol  $\pm 0.3\text{mm}$

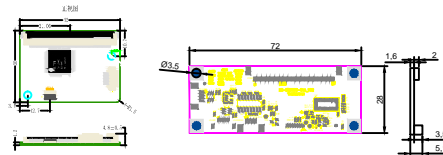

USB I/O Port					3DR ANGLE PROJECTION		
1	VBUS	FILE NO:	YS-CPT101G-V1	DWN:	LJL	UNIT	mm
2	DN			CHK:	LG	DATE	2021.10.06
3	DP			APP:	JXL	REV	V1
4	GND			CUSTOMER'S DATUM	10.1"-16:10		